



## TC-D350 Spec:MON/4K/P/V2.0 50-inch Plastic LED Monitor



### KEY FEATURES

- Size: 50 inches
- Resolution: 3840\*2160
- Ratio: 16:9
- Backlight: LED
- Brightness:  $\geq 250$ cd
- Field of view: 178°
- Interface: HDMI\*1, VGA\*1, USB\*1
- Material: plastic
- Standard speaker, HDMI cable, base or stand, remote control
- MTBF  $\geq 30000$  hours






## SPECIFICATIONS

<b>Panel type</b>	VA
<b>Panel size</b>	50"
<b>Aspect ratio</b>	16:9
<b>Gauge(mm)</b>	0.285375x0.285375
<b>Resolution</b>	3840×2160
<b>Luminance(cd/m<sup>2</sup>)</b>	300
<b>Contrast</b>	5000:1
<b>Response time(ms)</b>	9.5
<b>Refresh rate</b>	60HZ
<b>Colouration</b>	70%NTSC
<b>Display size(mm)</b>	1095.84(W) x 616.41(H)
<b>Viewpoint(H/V)</b>	178 °(H) / 178 °(V)
<b>Video input</b>	2*HDMI+2*DP
<b>Video output</b>	N/A
<b>Audio input</b>	N/A
<b>Audio output</b>	Speaker*2+Audio out
<b>Control interface</b>	N/A
<b>Speaker</b>	8Ω10W
<b>OSD(Language)</b>	16,countries (English,French,Spanish,Portuguese,German,Italian,Dutch,Swedish,Finnish,Polish,Czech,Russian,Korean,Simplified,Chinese,Traditional,Chinese,Japanese)
<b>Wall mounting holes (mm)</b>	200*200mm
<b>Wall mounted threads</b>	M6(Thread Depth 10mm)
<b>Input Voltage</b>	100 V ~ 240 V, 50-60 Hz
<b>Typical power consumption(W)</b>	≤120
<b>Standby power consumption(W)</b>	≤0.5
<b>Operating temperature</b>	0°C ~ 40°C
<b>Operating humidity</b>	20% ~ 85% RH Non-Condensing
<b>Storage humidity</b>	10% ~ 90% RH Non-Condensing
<b>Bare metal size(mm)</b>	1111.2(W)*77.4(D)*643.5(H)
<b>Package Size(mm)</b>	1200(W)*141(D)*725(H)
<b>Net weight(Kg)</b>	8.5
<b>Gross weight(Kg)</b>	12

# Tiandy

## DIMENSIONS (Unit: mm)

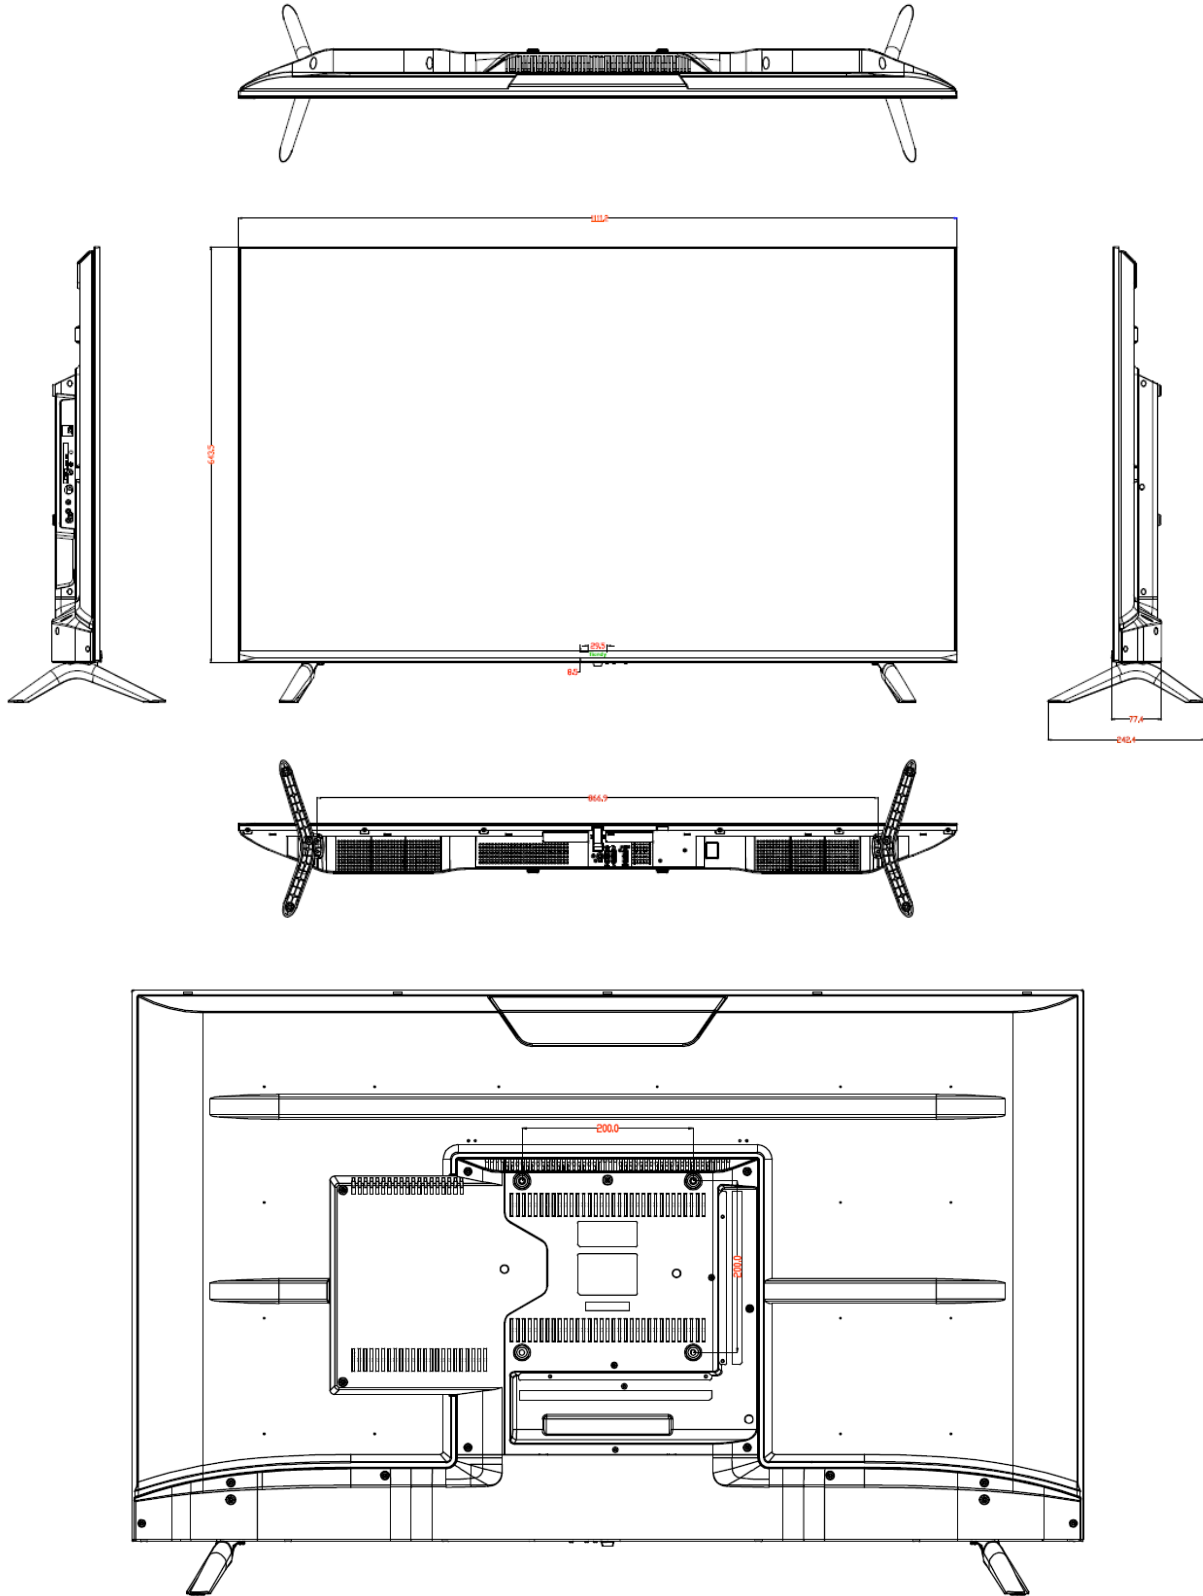

Tiandy Technologies Co.,Ltd



Tiandy Overseas



Tiandy



@tiandyofficial

**Tiandy Technologies Co.,Ltd.**

Email: [sales@tiandy.com](mailto:sales@tiandy.com)

Tel: +86-22-58596065

Website: [en.tiandy.com](http://en.tiandy.com)

Fax: +86-22-58596048