


PoE switch

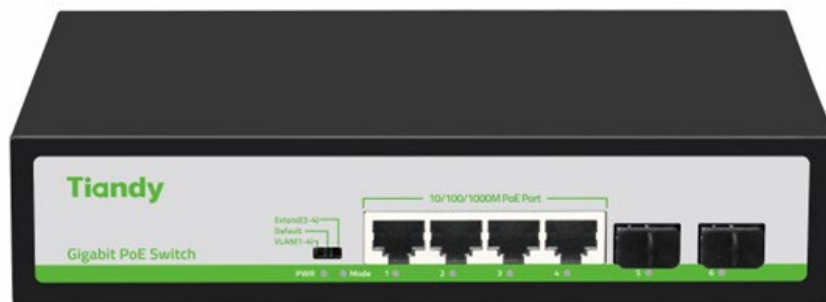

KEY FEATURES

- 4*10/100/1000M PoE ports +2*1000M SFP Port
- Comply with IEEE 802.3, IEEE 802.3u, IEEE802.3ab, IEEE802.3z standards
- Ethernet port 10/100/1000M rate auto adaptive
- Compatible with IEEE802.3af (15.4w), IEEE802.3at (30W);
- Port 1 support BT 40W.
- Flow control mode: full-duplex adopts IEEE 802.3x standard, half-duplex adopts Back pressure standard
- Support Port Auto-flip (Auto MDI/MDIX)
- Panel indicators to monitor working status and help fault analysis
- One-key smart switch, supports VLAN, Default, Extend

SPECIFICATIONS

I/O Interface	
Power	AC INPUT (100-240V)
Ethernet	4 Port 10/100/1000M PoE, 2 Port 1000M SFP
Performance	
Bandwidth	12 Gbps
Throughput	8.928Mpps
Packet Buffer	1Mbit
MAC Address	2K
Transfer Mode	Store and forward
Standard	
Network Protocol	IEEE802.3 IEEE802.3u IEEE802.3ab IEEE802.3z IEEE802.3x
PoE Protocol	IEEE802.3af (15.4W) IEEE802.3at (30W) POE port output voltage: DC 52V POE power supply core: 1/2+; 3/6
Industrial Standard	EMS: EN61000-4-2 (ESD)、 EN61000-4-5 (Surge)
Network Medium	10BASE-T: Cat 3、 4、 5 UTP (≤100 meter) 100BASE-TX: Cat5 or more UTP (≤100 meter) 1000Base-TX: Cat5 or more UTP/STP (≤100 meter)
Function	
LED Indicators	PWR (power supply), Mode (DIP), 1-6(Link & Data)
PWR	On: Powered on Off: Powered off
POE LED Buttons	Dual color light selection: default green (link data), switch yellow light (POE)
DIP Switch	
VLAN	Port isolation mode. In this mode, the PoE ports (1-4) of the switch cannot communicate with each other and can only communicate with the UP-link port.
Default	Normal mode, all port can communicate with each other, the transmission distance is within 100 meters, the transmission rate is 10M / 100/1000M adaptive;
Extend	Link extension mode, 3-4 ports PoE power supply and data transmission distance can be extended to 220 meters, the transmission rate becomes 10M
Environment	
Working Environment	Working Temperature: -10~50°C Storage Temperature: -40~70°C Working Humidity:10%~90%, non-condensing Storage Temperature:5%~95%, non-condensing
Physical Specifications	

Dimension	Product Dimension: 200*118*44.5mm Package Dimension: 245*190*60mm N.W:0.67kg G.W:0.97kg
Packing Info	Carton MEAS:520*320*400mm Packing Qty:20 units Packing Weight:20.4KG
Power Voltage	Input Voltage: AC 100-240 V Power supply:52V /1.25A
Power	Product power: maximum 5W POE power: maximum 60W

DIMENSIONS

